





# VC-BC301P Firmware Upgrade Instruction


## 1 Device and Tool Preparation

1.1 Please prepare following devices and tools before FW upgrade.

VC-BC301P	PC or Laptop
	 or
Power adapter and power cord	Ethernet cable
	


## 2 Connections and get IP address (skip the step If you know the IP of your camera.)

2.1 Connect camera to network

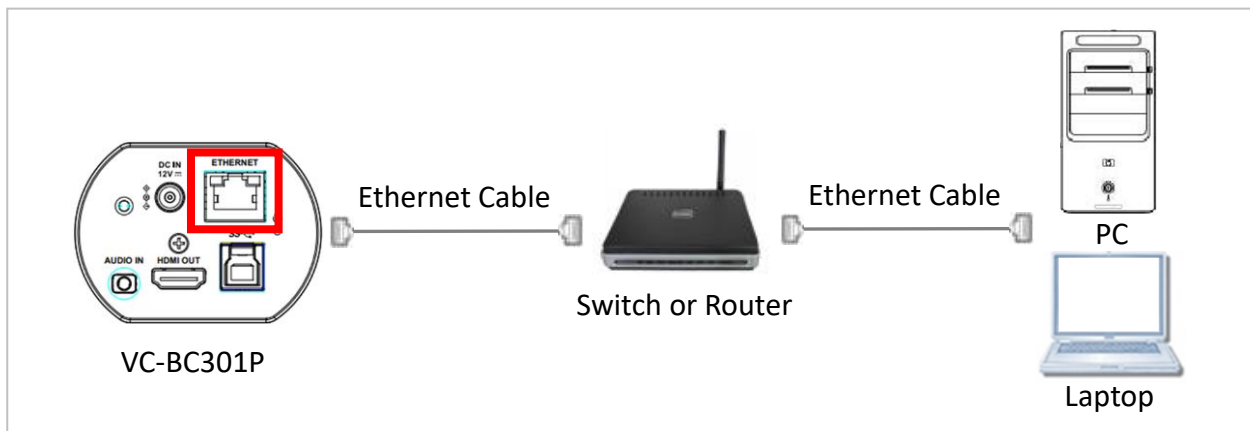


2.2 Download VMS5.0 software from Lumens website and install it.

2.3 Launch VMS software and click “Discovery Device IP” button to get the camera IP address. (Only can search the device of the same network.)

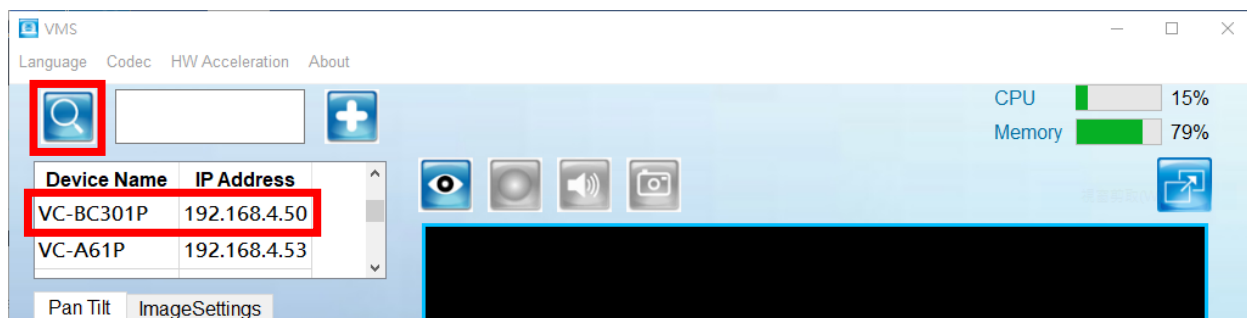

### 3 FW Download


3.1 Open browser and enter the IP address of the camera in the address bar.

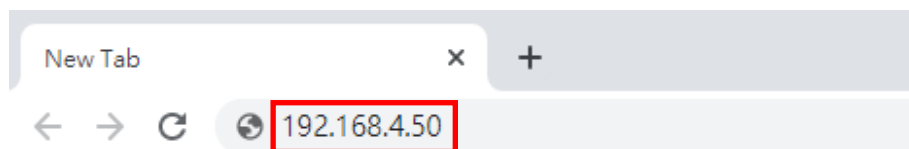


3.2 Enter the account and password to log in webpage.

Account: admin

Password: 9999

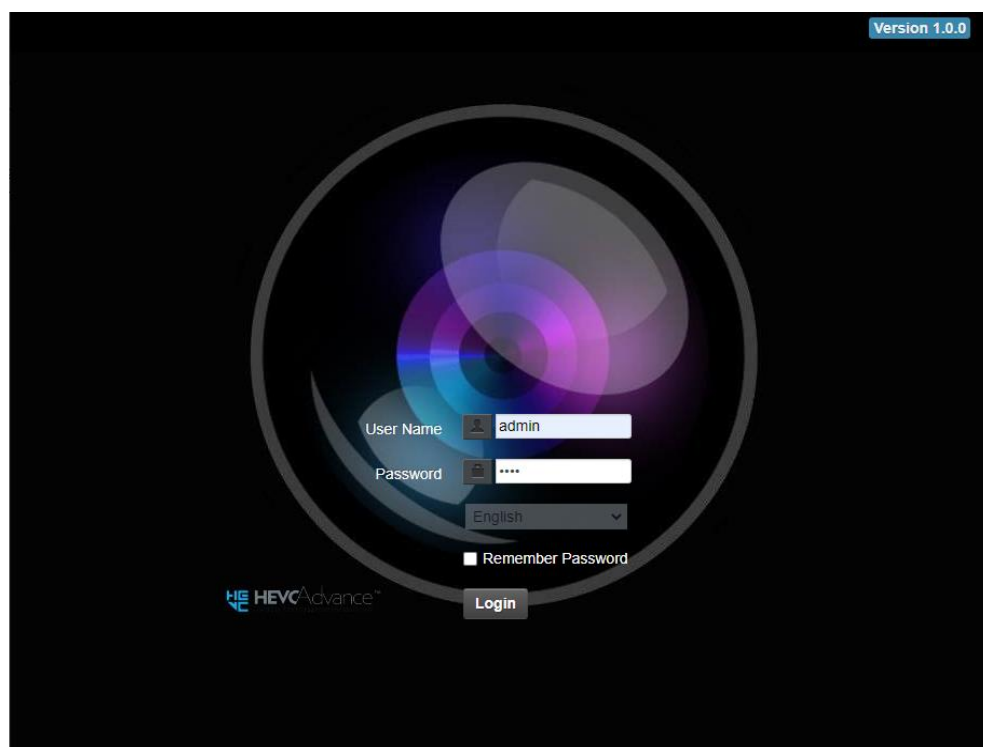


3.3 Select [Maintenance] --> [FW Upgrade] and click [Choose files...]  
Select proper firmware then press [Upgrade].

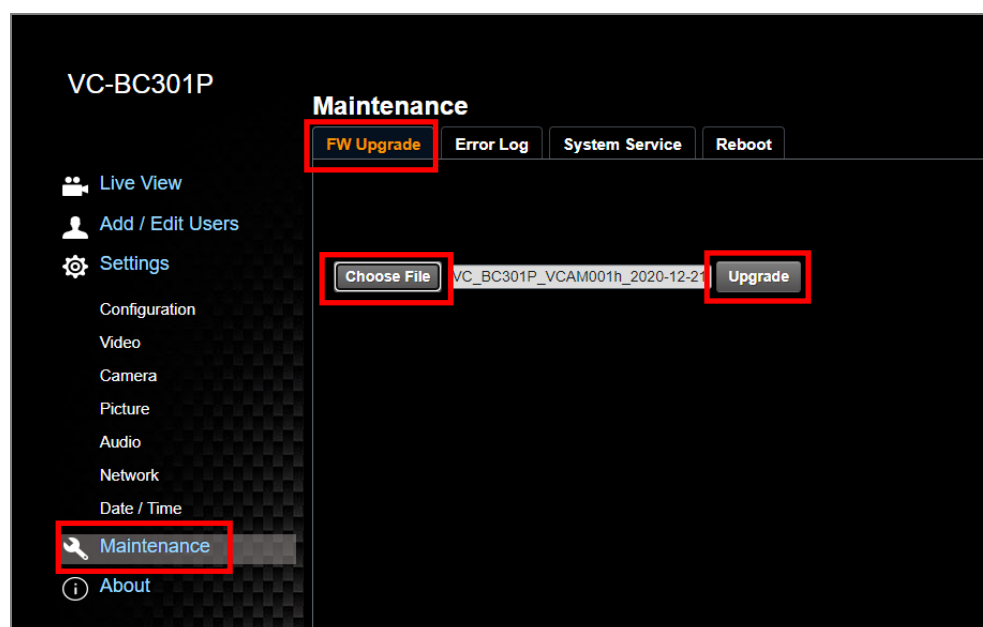


3.4 FW download will start. (Around 2 minutes taken)




3.5 FW upgrade is successful. Restart system & Initialization.

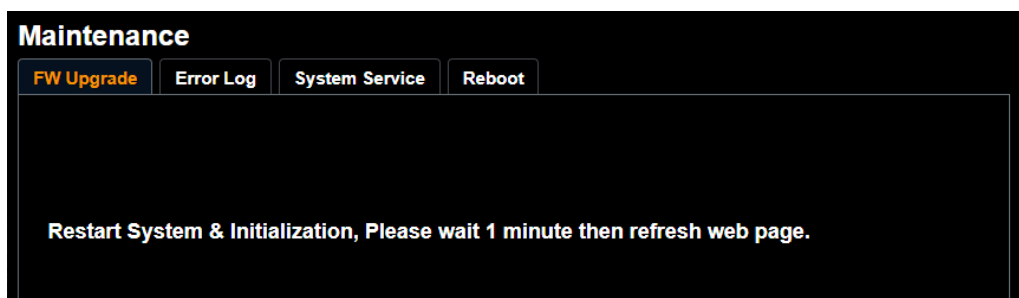

3.6 Please do the [Factory Reset] to ensure the procedure is completed.  
[Maintenance]-->[System Service]-->[Factory Reset]

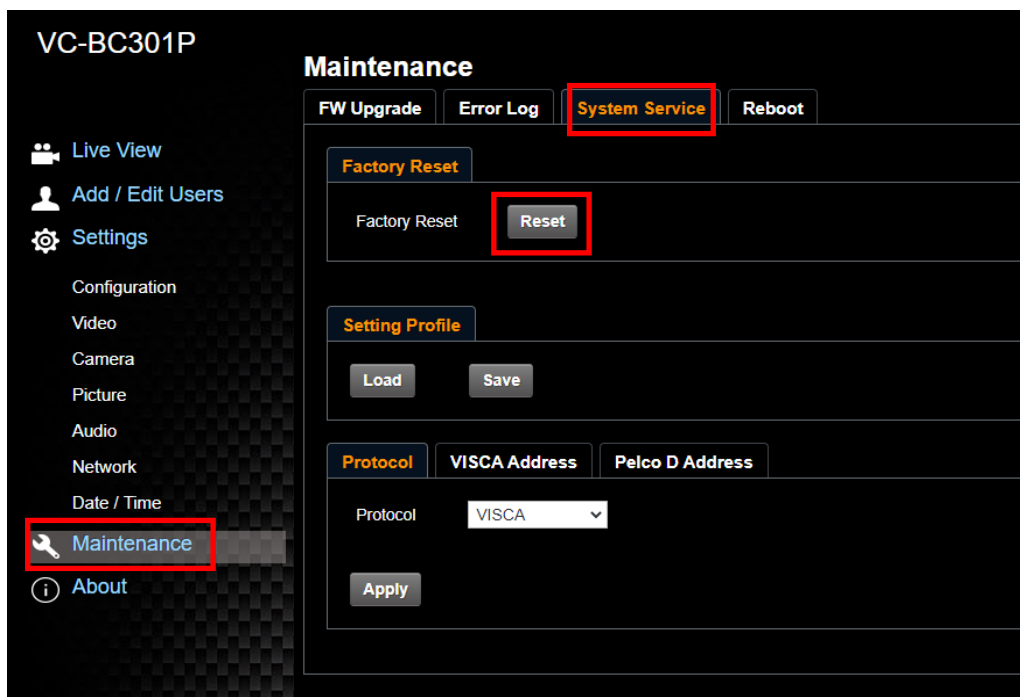

3.7 Click [Yes] and the unit will reboot.

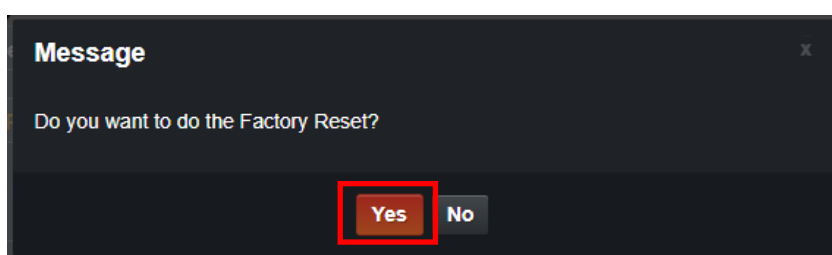

3.8 Login webpage again and check the FW version.  
[About]-->[Firmware Version]

